

Specification

| | |
|--|--|
| SDI input | |
| Standards | SMPTE 259M 270Mb/s 525/625 SDI |
| Connector | 75Ω BNC |
| Signal level | 800mV p-p ±10% (terminated) |
| Return loss | >15dB to 270MHz |
| Cable equalisation | > 350m automatic (Belden 8281) |
| SDI output | |
| Standards | SMPTE 259M 270Mb/s 525/625 SDI |
| Connector | 75Ω BNC |
| Signal level | 800mV p-p ±10% (terminated) |
| DC offset | ±100mV |
| Return loss | >18dB to 270MHz |
| AES-EBU input | |
| Standard | Balanced AES-EBU AES3-2003 |
| Number | 2 |
| Type | Transformer coupled |
| Connector | Removable screw terminal |
| Termination | Balanced 110Ω |
| Level | 0.2-10V p-p |
| Sample rate | 48kHz (synchronised to video) |
| Audio embedding | |
| Standard | SMPTE 272M |
| Resolution | 20 or 24 bit |
| Power | |
| Voltage | 6-12V DC |
| Current | 440mA at 6V |
| Power connector | Locking 2.5mm jack connector (centre +ve) |
| Other | |
| LEDs | Show power, signal presence & embedding status |
| Temperature range | 0°C to 40°C |
| Dimensions | 63.5mm x 84mm x 30mm (excluding connectors) |
| Weight | 175g |
| We reserve the right to change technical specifications without prior notice. E&OE. | |



User Guide



4461DB SDI balanced AES-EBU audio embedder

Inserts two balanced AES-EBU digital audio streams into any group within a 270Mb/s 525/625 SDI signal

www.miniblox.com

DTL Broadcast Ltd, Johnson's Estate, Silverdale Road, Hayes, Middlesex, UB3 3BA, UK
 Phone: +44 (0) 20 8813 5200 Fax: +44 (0) 20 8813 5022
 Internet: www.dtl-broadcast.com support@dtl-broadcast.com

\\Dtl-server\company\PRODUCTS\MiniBlox\User Guides\4461DB Iss3 2.doc

EU declaration of conformity

We certify that this apparatus conforms to the requirements of the EMC and Low Voltage Directives. Emissions EN55103-1, susceptibility EN55103-2 and safety EN60950-1 2002.

15 July 2005



Warranty

DTL Broadcast Ltd warrants this unit against defects in materials and workmanship for a period of one year from the date of shipment. At its option, the company will repair or replace products that prove to be defective during the warranty period, provided they are returned to the company with advance notification and with freight prepaid. Repairs may only be conducted by an authorised representative of the company. As a result any unauthorised repair or attempted repair will automatically void the warranty.

When a distributor supplies the company's products, that distributor should be approached initially if there are any warranty problems.

The company makes no other warranties, express or implied, as to the merchantability, fitness for a particular purpose, or otherwise. The company's liability for any cause, including breach of contract, breach of warranty, or negligence, with respect to products sold by it, is limited to repair or replacement by the company, at its sole discretion. This remedy is exclusive. In no event shall the company be liable for any incidental or consequential damages, including loss of profits.

DTL MiniBlox™ - solutions in a box


General description

The 4461DB SDI balanced AES-EBU audio embedder inserts two balanced stereo AES-EBU streams into the ancillary data space of a 270Mb SDI signal. The input stream can be embedded as 20 or 24 bit audio. Embedding conforms to SMPTE 272M and allows audio to be inserted into any of the four groups. Existing audio groups can be added to or completely removed. The audio must be synchronous with the video. There is automatic cable equalisation and a re-clocked SDI output is provided.

Main features

- Inserts two synchronous balanced AES-EBU stereo pairs into any group
- Replaces or adds to existing audio
- Automatic detection of 525/625 SDI
- Selectable 20 or 24 bit embedding
- LEDs show group status and input signal presence
- Automatic input cable equalisation to over 350m
- Re-clocked SDI output
- Extremely compact and rugged

Functional block diagram

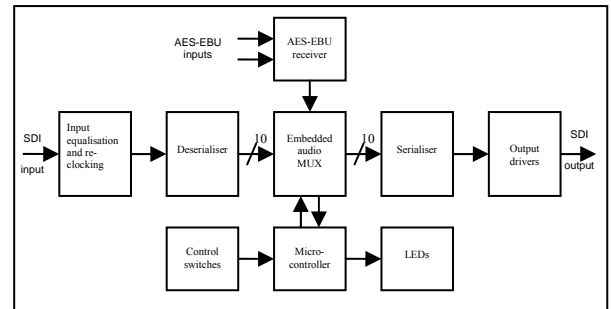

Installation and operation

The unit is simple to use and install.

- Set the dipswitches by referring to the table and description below or the table on the rear of the unit.
- Connect a valid 270Mb/s SDI input and valid AES-EBU inputs.
- Connect SDI output.
- Apply power to the unit either via the locking power connector from the external power supply or 1U rack frame, or by sliding into the 2U rack mounting frame with central power supplies.
- On power-up the unit will perform a short (3 second) self test. The group LEDs will flash while this is in progress.
- The signal LED will be green when there is power and a valid 270Mb/s SDI signal present or red when there is power but no SDI signal.
- One of the group LEDs will light corresponding to the group selected by the switches. This LED will be green if the unit is receiving a valid video signal and successfully embedding audio. The LED will otherwise be red.
- The switch settings can be altered whilst the unit is powered and the changes are implemented immediately.
- The mounting bracket supplied can be used to install the unit. The bracket should first be fixed vertically to any surface. The MiniBlox can then be lowered onto the dovetail part of the bracket with the front endplate uppermost to retain it.

Switch settings

| Switch | 1 | 2 | Switch | OFF | ON |
|---------|-----|-----|--------|----------|-----------|
| Group 1 | OFF | OFF | 3 | Cascade | Overwrite |
| Group 2 | OFF | ON | 4 | 24-bit | 20-bit |
| Group 3 | ON | OFF | 5 | Pass EDH | New EDH |
| Group 4 | ON | ON | 6 | NOT USED | |

Switches 1 & 2 set the group into which audio packets are inserted.

Switch 3 determines whether existing audio packets are deleted from the video signal. When the switch is off, new audio packets are appended without deletion of existing packets allowing up to four units to be connected in cascade.

Switch 4 controls the bit depth of the embedded audio. When the switch is off, extended audio packets are multiplexed into the video signal (24 bit audio). When the switch is on, extended audio packets are not included (20 bit audio).

Switch 5 selects between the unit passing through any EDH data unaltered or generating new EDH data.

Switch 6 is not used.