


D&A 3610 AES/EBU 24 bit DAC

Introduction

The 3610 AES/EBU 24 bit DAC is one of the modules in the expanding D&A distribution system. Designed to the highest specification, and meeting all relevant international standards including CE approval, digital and analogue audio and video modules can be mixed within a frame to satisfy a wide variety of interfacing requirements.

Up to 14 modules can be housed in the 3301 3U frame with a single power supply or 12 in the 3302 3U frame with dual power supplies.

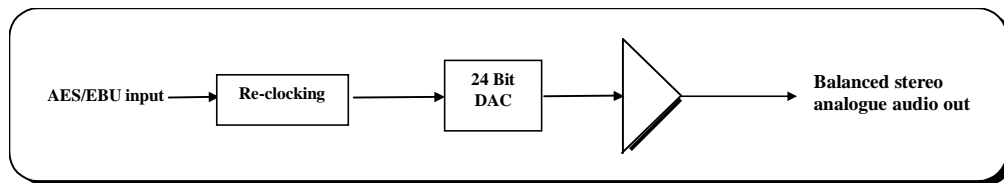


Description

The 3610 AES/EBU digital to analogue converter is a single channel unit that incorporates a high quality 24 bit DAC and provides a balanced stereo analogue output.

The associated 3691 audio D type rear connector accepts a balanced AES/EBU input (the 3990 D type to removable screw terminal adapter is available for use with this unit). Manual equalisation is provided to cater for long input cables. The alternative 3692 audio BNC rear connector accepts an unbalanced AES/EBU input. User configurable alarms can be triggered (card alarm LED, frame LED and external alarm) for loss of power and absence of input signal.

Features

- Cost effective
- High quality 24 bit DAC
- Card edge level controls for balanced stereo analogue output
- Balanced (via D type or screw terminals) or unbalanced (via BNC) operation
- Manual equalisation adjustment for long input cables
- AES3-1992 or SMPTE 276M compatible
- Transformer coupling on input for good common mode performance
- Card edge alarm/power status, input signal absence & AES/EBU lock LEDs
- User configurable alarms can be triggered (card alarm LED, frame LED and external alarm) for loss of power and absence of input signal

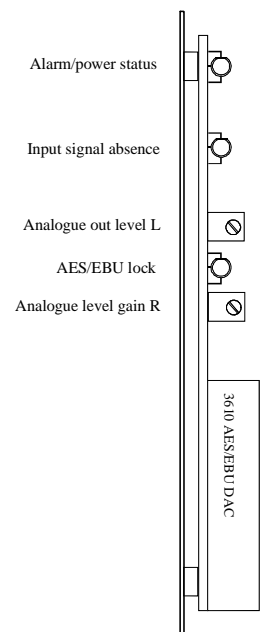



D&A 3610 AES/EBU 24 bit DAC

Specification

3691 D type connector

3692 BNC connector

Input		
Number	1	1
Type		Transformer coupled
Standards	AES3-1992	SMPTE 276M
Impedance	110Ω	75Ω
Signal level	2-7V p-p	0.1 to 1V p-p
Cable length - no eq	<110m	>1000m (PSF1/2 or
-with eq	110-225m (Belden 8451)	Belden 8281)
Connector	25 way D type (3990 D type to removable screw terminal adapter option)	BNC
Sampling frequency		22-56KHz
Output-analogue		
Number		1
Standards		Balanced stereo audio
Impedance		<50Ω
Signal level		Adjustable +12 to +20dBu
Quatization		24 bits
Connector	25 way D type (3990 D type to removable screw terminal adapter option)	BNC
Other		
User selectable alarm options		Loss of power & loss of input signal
Power supply required		Frames with 3310 6.5V power supplies only
Power consumption		1.8W
Temperature range		0°C to 45°C
<i>Above measurements relate to the 3610 DAC with 3691 connector unit housed in the 3301 frame using the 3310 power supply.</i>		

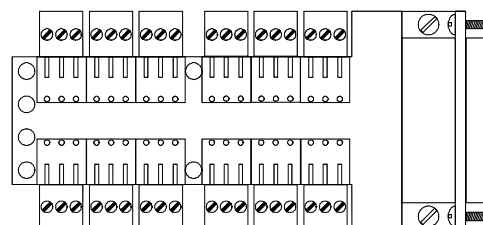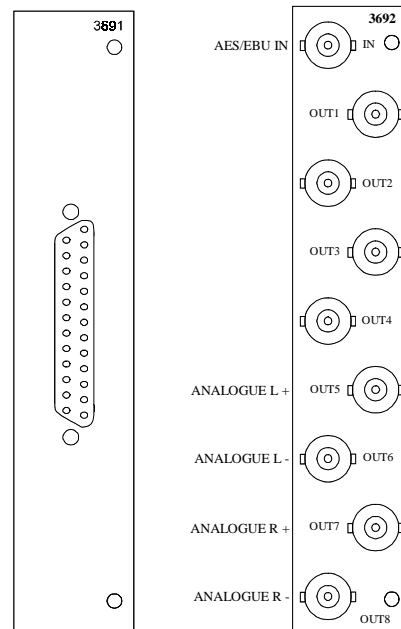

3990 D type to removable screw terminal adapter

Ordering information

Part no.	Description	Weight	Height	Width	Depth
3610	AES/EBU DAC	750g	100mm	25mm	220mm
3691	Audio D type rear connector (balanced)	100g	100mm	25mm	70mm
3692B	Audio BNC rear connector (unbalanced) for 3610 DAC	100g	100mm	25mm	70mm
3990	D type to removable screw terminal adapter	45g	54mm	16mm	115mm

We reserve the right to change technical specifications without prior notice. E&OE.

LOCAL
DISTRIBUTOR

DTL Broadcast Ltd
 Johnson's Estate, Silverdale Road,
 Hayes, Middx, UB3 3BA, UK.
 Phone: +44 (0) 20 8813 5200 Fax: +44 (0) 20 8813 5022
 Internet: www.dtl-broadcast.com Email: info@dtl-broadcast.com

